


Drustvo za Proizvodstvo ,Promet,Inzenering

**M.S.M. D.O.O.**

**MSM REDUKTORI- 2RNV-S**

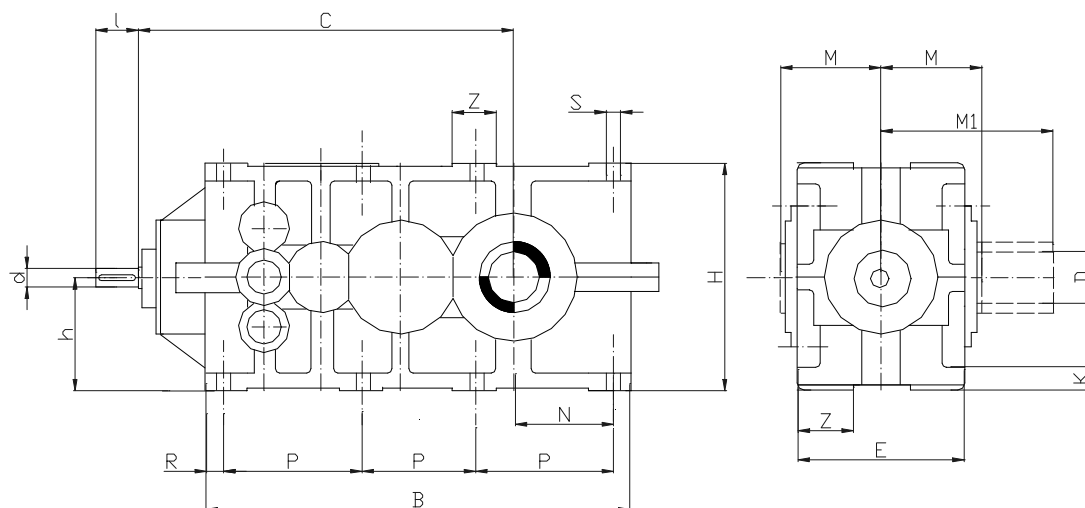

merkite se vo (mm)

gole mina	K U K I S T E						V R A T I L O						PRIKLUCNI MERKI					tezi kgr	ulje lit	
	B	C	E	H	h	K	<11,2		=11,2-18		DH7	M	M1	N	P	R	S			Z
							d	l	d	l										
<b>160</b>	581	500	230	320	160	32	40	110	35	80	80	140		120	170	35	18	60	160	7
<b>180</b>	648	565	260	360	180	32	45	110	40	110	90	155		137	192	35	18	68	225	10
<b>200</b>	725	625	290	400	200	40	50	110	45	110	105	170		146	210	45	22	75	315	14
<b>225</b>	810	705	320	450	225	40	55	110	50	110	115	185	275	160	235	50	22	85	425	20
<b>250</b>	930	785	360	500	250	50	60	140	55	110	125	205	300	190	270	60	26	95	565	26
<b>280</b>	1004	875	390	560	280	50	65	140	60	140	145	220	335	203	295	60	26	105	800	40
<b>315</b>	1139	975	440	630	315	63	75	140	70	140	170	245	380	233	335	65	33	120	1060	56
<b>355</b>	1278	1085	490	710	335	63	90	170	80	170	185	270	410	256	375	75	33	130	1480	80
<b>400</b>	1427	1215	560	800	400	80	100	210	90	170	205	305	460	288	422	80	39	150	2050	115
<b>450</b>	1617	1385	620	900	450	80	110	210	95	170	245	335	515	335	480	85	39	170	2800	155
<b>500</b>	1785	1525	680	1000	500	100	120	210	110	210	265	365	565	360	530	95	45	185	3800	230
<b>560</b>	2180	1705	750	1120	560	100	130	250	120	210	305	400	620	394	590	110	45	210	5200	320

tolerancija na kraevi na vratila za  $d \leq 50$  -k6, a za  $d > 50$  -m6  
klinovi na vratila spored DIN 6885 forma A